

迷你褶式標準型高效率空氣過濾器


Mini Pleat Standard Capacity HEPA Filter

特徵 Features

效率Efficiency : PAO 99.99%、99.995% at 0.3 μ m
標準Std. : EN1822 · Class H13 / H14

使用條件Operating conditions

耐用溫度Temperature : 80°C
耐用溼度Humidity : 100%RH (NO Dew)

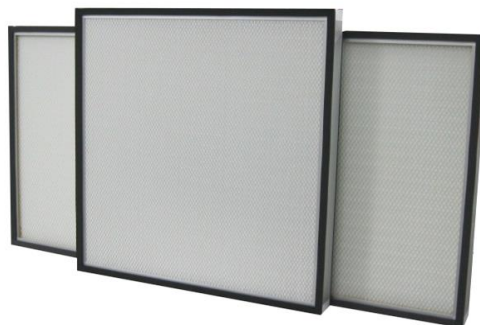

尺寸Dimension WxDxH (mm)	風量Air Volume				初期壓損 Initial P.D (Pa)	最終壓損 Final P.D (Pa)
	H13		H14			
	CMM	CFM	CMM	CFM		
305x610x50	9	321	8	287	249 (25.4 mmH ₂ O)	500 (50.8 mmH ₂ O)
610x610x50	19	677	17	606		
760x610x50	24	852	22	762		
915x610x50	29	1033	26	924		
1220x610x50	39	1389	35	1243		
570x570x50	7	247	6	216	98 (10 mmH ₂ O)	200 (20 mmH ₂ O)
1170x570x50	15	522	13	456		
1170x870x50	23	811	20	710		
1470x720x50	24	842	21	737		
1170x1170x50	31	1101	27	963		

※ 另有高度70mm可供選擇The height in 70mm is available as an option

※ 特殊尺寸及規格可依客戶需求製作。Customized size and specification are available to meet customer's requirements.

※ 另有凝膠式PTFE可供選擇。The Gel type of PTFE is available as an option.

